



Features



High PID resistant

Advanced cell technology and qualified materials lead to high resistance to PID



High module efficiency

Advanced module technology delivers superior module efficiency



Current sorting process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Positive tolerance

Positive tolerance of up to 5W delivers higher output reliability



Extended wind and snow load tests

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *



High system voltage Compatible

Maximum 1500VDC system voltage saves total system cost

Certifications and standards:
IEC 61215, IEC 61730, conformity to CE



Chinayard Co.,LTD designs, manufactures and delivers high efficient solar modules to the world.

Founded in 2009, Chinayard is well known for its advanced technology, reliable product quality, and excellent customer service.

As one of leading PV enterprises, Chinayard has delivered more than 2.0G of solar products to residential, commercial, utility and off-grid projects all around the world.

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty



Chinayard distributor



Electrical characteristics at Standard Test Conditions(STC)

Model	CYC-V158-MF36-100M
Maximum Power(Pm)	100Wp
Cell type	Mono
Optimum Operating Current(Imp)	5.50A
Short Circuit Current(Isc)	5.85A
Optimum Operating Voltage(V)	18.16V
Open Circuit Voltage(Voc)	21.38V
Maximum System Voltage	1000V
Module Dimension	860x670x35mm
Glass Dimension	854x664mm

Standard Test Conditions (STC): Irradiance 1,000 W/m²; AM 1.5; module temperature 25°C.
Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.


Temperature Characteristics

Nominal Operating Cell Temperature(NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.39%/K
Temperature Coefficient of Voc	-0.29%/K
Temperature Coefficient of ISC	+0.05%/K

Material Characteristics

Frame	Anodized aluminum alloy
Front Glass	low-iron tempered glass ,3.2mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells quantity	36 pieces monocrystalline solar cells series strings

Dimensions and Structure

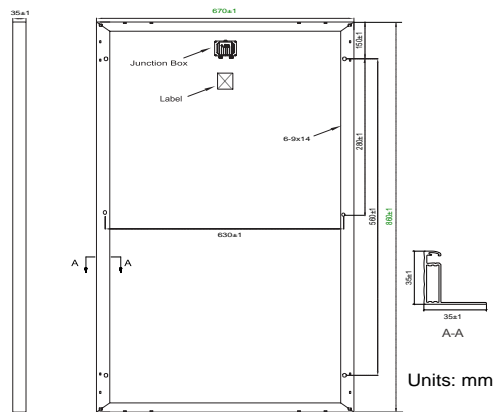

Chinayard distributor



elSOL

Chinayard Co.,LTD

Version: CYC_V2018_EN

[All information and data are subject to change without notice.](#)

Email:chinayardliu@126.com www.chinayard.com