


MONO

144 Half-Cells



V166series, monofacial module

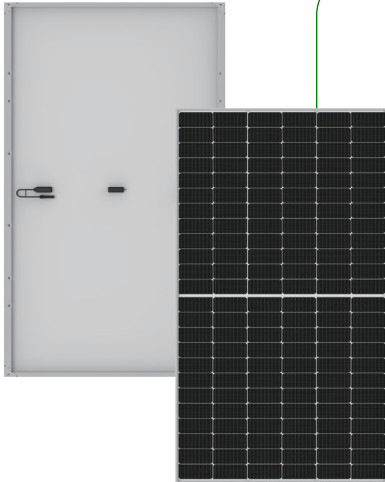

Features



High PID resistant

Advanced cell technology and qualified materials lead to high resistance to PID



High module efficiency

Advanced module technology delivers superior module efficiency



Current sorting process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



Positive tolerance

Positive tolerance of up to 5W delivers higher output reliability



Extended wind and snow load tests

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *



High system voltage Compatible

Maximum 1500VDC system voltage saves total system cost

Certifications and standards:
IEC 61215, IEC 61730, conformity to CE




Chinayard Co.,LTD designs, manufactures and delivers high efficient solar modules to the world.

Founded in 2009, Chinayard is well known for its advanced technology, reliable product quality, and excellent customer service.

As one of leading PV enterprises, Chinayard has delivered more than 2.0G of solar products to residential, commercial, utility and off-grid projects all around the world.

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

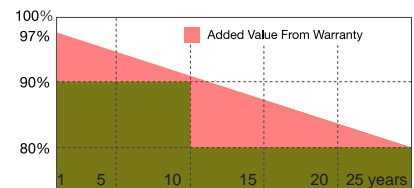

Chinayard distributor



Chinayard Co.,LTD

Version: CYC_V202104_EN

All information and data are subject to change without notice.

Email:chinayardliu@126.com

www.chinayard.com

Electrical characteristics at Standard Test Conditions(STC)

Model	CYC-V166-			
	MF144-445M	MF144-450M	MF144-455M	MF144-460M
Maximum Power(Pm)	445Wp	450Wp	455Wp	460Wp
Cell type	Mono	Mono	Mono	Mono
Optimum Operating Current(Imp)	10.82A	10.89A	10.96A	11.03A
Short Circuit Current (Isc)	11.58A	11.66A	11.73A	11.80A
Optimum Operating Voltage(V)	41.09V	41.29V	41.49V	41.69V
Open Circuit Voltage(Voc)	48.85V	49.08V	49.32V	49.56V
Maximum System Voltage	1500V			
Module efficiency	20.47%	20.70%	20.93%	21.16%

Standard Test Conditions (STC): Irradiance 1,000 W/m²; AM 1,5; module temperature 25°C.

Measuring uncertainty of power: ±3%.

Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Temperature Characteristics

Nominal Operating Cell Temperature(NOCT) 45±2°C

Temperature Coefficient of Pmax -0.35%/°C

Temperature Coefficient of Voc -0.27%/°C

Temperature Coefficient of ISC +0.48%/°C

Material Characteristics

Dimension 2094*1038*35mm

Weight Appro 24.3kgs

Frame Anodized aluminum alloy

Front Glass low-iron tempered glass ,3.2mm

Cell Encapsulation EVA (Ethylene-Vinyl-Acetate)


Back Sheet Composite film

Cells (quantity/material) 144 piece solar cells

Junction Box IP68

Cable&Connector 4 mm², 300mm length (can be customised)

Dimensions and Structure

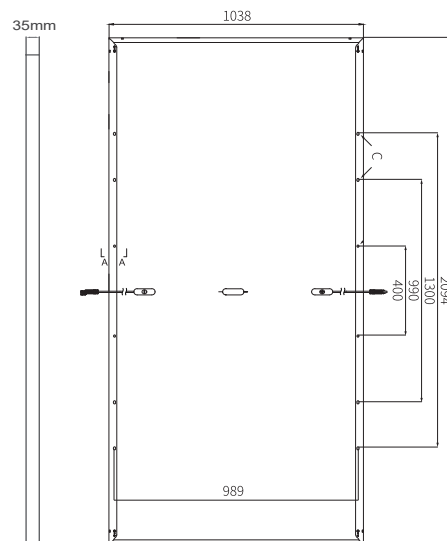

Units: mm

Packaging

Container 20' 150 pieces, 30Pcs/Pallet

Container 40'HC 660 pieces

Chinayard distributor



 **eSOL**

Chinayard Co.,LTD

Version: CYC_V202104_EN

All information and data are subject to change without notice.

Email:chinayardliu@126.com

www.chinayard.com